


Kæde til kædesave



MADE IN USA

OZAKI Pro-Steel

Professional range

VOR OZAKI kæde er produceret efter reglen om at opnå den højeste kvalitet og tilbyde superb ydelse, pålidelighed og holdbarhed.

Legeret af stål og nikkel

Alle Ozaki links og skærende kanter er lavet af special stål, som garanterer en bedre fasthed, en højere modstand mod slid og stabilitet i alle temperaturer, fra tropisk varme til hård vinter.

INDUSTRI KROM BELÆGNING

Alle skærende kanter på **OZAKI** kæden er beskyttet af en krome belægning. Dette garanterer en høj skære kvalitet og længere levetid.



ROTOBLASTING PROCES

Hver chisel og hver led, er designed til at give maksimum holdbarhed mod slid

EKSKLUSIV SLIBEPROCES

Alle OZAKI kæder er slebet efter monterings. Derfor er der ingen grund til justering.

Your satisfaction, our priority

Kæde for kædesave

OZAKI Pro-Steel

Professional range

7 1/4 PITCH & 3/8 LO PROFILE **2503 +** **Deling** **Spor**



ZK1450LP 1/4" .050" (1,3mm)



ZK5091LP 3/8" Lo Pro .050" (1,3mm)

7 NARROW KERF **2503 +** **Deling** **Spor**



ZK32595LP .325" Lo Pro .050" (1,3mm)



ZK4390LP 3/8" Lo Pro .043" (1,1mm)

7 SEMI CHISEL **2503 +** **Deling** **Spor**



ZK50J20SC .325" .050" (1,3mm)
ZK58J21SC .325" .058" (1,5mm)
ZK63J22SC .325" .063" (1,6mm)



ZK50A72SC 3/8" .050" (1,3mm)
ZK58A73SC 3/8" .058" (1,5mm)
ZK63A75SC 3/8" .063" (1,6mm)



ZK58B26SC .404" .058" (1,5mm)
ZK63B27SC .404" .063" (1,6mm)

7 CHISEL **2503 +** **Deling** **Spor**



ZK50JL20CL .325" .050" (1,3mm)
ZK58JL21CL .325" .058" (1,5mm)
ZK63JL22CL .325" .063" (1,6mm)



ZK50AL72CL 3/8" .050" (1,3mm)
ZK58AL73CL 3/8" .058" (1,5mm)
ZK63AL75CL 3/8" .063" (1,6mm)



ZK58BL26CL .404" .058" (1,5mm)
ZK63BL27CL .404" .063" (1,6mm)

Disse kæder fås i ruller på 25 eller 100 Fod
(for 1/4 rulle, tilføj 25P efter best. nr..)

CHAINSAW CHAINS

OZAKI Pro-Steel

Professional range



Karakteristik OZAKI					X Liste				
Deling	Spor	Type	Teeth	2503 +	Oregon	Windsor	Stihl	Carlton	Gl. Swiss
1/4	.050" 1,3mm	Semi-chisel		ZK1450LP	25AP	50K	13RM1		
325	.050" 1,3mm	Semi-chisel		ZK50J20SC	20BP	50J	23RM1	K1C	25030083
	.058" 1,5mm			ZK58J21SC	21BP	58J	25RM1	K2C	25030085
	.063" 1,6mm			ZK63J22SC	22BP	63J	26RM1	K3C	25030086
	.050" 1,3mm	Chisel		ZK50JL20CL	20LP	50JL	23TS	K1L	
	.058" 1,5mm			ZK58JL21CL	21LP	58JL	25TS	K2L	
	.063" 1,6mm			ZK63JL22CL	22LP	63JL	26TS	K3L	
	325 LP	.050" LP 1,3mm	Semi-chisel		ZK32595LP	95VP			
3/8 Lopro	.043" 1,1mm	Semi-chisel		ZK4390LP	90SG	43RG	61PMN1		
	.050" 1,3mm			ZK5091LP	91VS	50R	63PM1	N1C	25030090
3/8	.050" 1,3mm	Semi-chisel		ZK50A72SC	72DP	50A	33RM1	A1EP	25030093
	.058" 1,5mm			ZK58A73SC	73DP	58A	35RM1	A2EP	25030095
	.063" 1,6mm			ZK63A75SC	75DP	63A	36RM1	A3EP	25030096
	.050" 1,3mm	Chisel		ZK50AL72CL	72LP	50AL	33RS	A1LM	
	.058" 1,5mm			ZK58AL73CL	73LP	58AL	35RS	A2LM	
	.063" 1,6mm			ZK63AL75CL	75LP	63AL	36RS	A3LM	
404	.058" 1,5mm	Semi-chisel		ZK58B26SC	26P	58B		B2EP	
	.063" 1,6mm			ZK63B27SC	27P	63B	46RM1	B3EP	
	.058" 1,5mm	Chisel		ZK58BL26CL	58L				
	.063" 1,6mm			ZK63BL27CL	59L				

OZAKI afkortede kæder til gode priser !!



Absolute quality !



Chain	.325"			.325"			3/8"			3/8"			3/8" Lo Pro		.404"		.404"		.325" Lo Pro	
	Semi-chisel			Chisel			Semi-chisel			Chisel			Semi-chisel		Semi-chisel		Chisel		Semi-chisel	
Gauge	.050	.058	.063	.050	.058	.063	.050	.058	.063	.050	.058	.063	.043	.050	.058	.063	.058	.063	.050	
	1,3mm	1,5mm	1,6mm	1,3mm	1,5mm	1,6mm	1,3mm	1,5mm	1,6mm	1,3mm	1,5mm	1,6mm	1,3mm	1,5mm	1,6mm	1,6mm			1,3mm	
Cross reference list	Oregon	20BP	21BP	22BP	20LP	21LP	22LP	72DP	73DP	75DP	72LP	73LP	75LP	90SG	91VS	26P	27P	58L	59L	95VP
	Windsor	50J	58J	63J	50JL	58JL	63JL	50A	58A	63A	50AL	58AL	63AL	43RG	50R	58B	63B			
	Stihl	23RM1	25RM1	26RM1	23TS	25TS	26TS	33RM1	35RM1	36RM1	33RS	35RS	36RS	61PM1	63PM1			46RM1		23RM
Drive link	<p>For at bestille kæde i afkortede længde - skrives antal led efter bestillingsnummeret</p>																			
34																				
35																				
36																				
37																				
38																				
39																				
40																				
41																				
42																				
43																				
44																				
45																				
46																				
47																				
48																				
49																				
50																				
51																				
52																				
53																				
54																				
55																				
56																				
57																				
58																				
59																				
60																				
61																				
62																				
63																				
64																				
65																				
66																				
67																				
68																				
69																				
70																				
71																				
72																				
73																				
74																				
75																				
76																				
77																				
78																				
79																				
80																				
81																				
82																				
83																				
84																				
85																				
86																				
87																				
88																				
89																				



OZAKI PRO-STEEL

The guide bars with pignons **OZAKI PRO-STEEL** is a laminated guide bar, made out of a specially studied steel for the toughest cuts. The pignon is made out of the same steel as the blade. It was fixed through a special procedure to ensure total security.



OZAKI PRO-TIP

The guide bar **OZAKI PRO-TIP** is a professional guide bar with riveted sprocket nose. Made out of a special steel to complete the most demanding cuts. Easy to replace sprocket nose and ensures longer lasting. The guide bar **OZAKI PRO-TIP** is a mono block with an sprocket nose with pinions.

X - LISTE

2503 +	Réf OREGON	Réf WINDSOR	2503 +	Réf OREGON	Réf WINDSOR
170-2095	120SPEA041	12PKU50SSR	170-2112	178SLHD009	17HS58SPNA
170-2096	140SPEA041	14PKU50SSR	170-2113	188SLHD009	18HS58SPNA
170-2097	160SPEA041	16PKU50SSR	170-2114	208SLHD009	20HS58SPNA
170-2098	120GPEA061	12MXL50SSR	170-2115	158SLGK095	15CJL58SPYJ
170-2099	140GPEA061	14MXL50SSR	170-2116	168SLGK095	16CJL58SPYJ
170-2100	160GPEA061	16MXL50SSR	170-2117	188SLGK095	18CJL58SPYJ
170-2101	120SDEA318	12MC50SSR	170-7808	160SLGZ095	16CJL50SPYJ
170-2102	140SDEA318	14MC50SSR	170-7809	180SLGZ095	18CJL50SPYJ
170-2103	160SDEA318	16MC50SSR	170-2118	158SLBK041	-
170-2104	120SPEA074	12PN50SSR	170-2119	168SLBK041	-
170-2105	140SPEA074	14PN50SSR	170-2120	188SLBK041	-
170-2106	160SPEA074	16PN50SSR	170-2121	168SLHD024	16JR58SPNA
170-2107	140SPEA064	14FJ50SSR	170-2122	188SLHD024	18JR58SPNA
170-2108	160SPEA064	16FJ50SSR	170-2123	208SLHD024	20JR58SPNA
170-3001	153SLGD025	154063SPYJ	170-2124	163SLHD025	164063SPNA
170-2109	163SLGD025	164063SPYJ	170-2125	183SLHD025	184063SPNA
170-2110	183SLGD025	184063SPYJ	170-2126	203SLHD025	204063SPNA
170-2828	158SLHD009	15HS58SPNE	170-7366	180SLHD176	18HL50SPYA
170-2111	168SLHD009	16HS58SPNA	170-7367	200SLHD176	20HL50SPYA

GUIDE BAR

Vælg det rigtige sværd


For at vælge det rigtige sværd - følg nedenstående Guide.



- 1 Længde**
- 2 Størrelsen på guide rillen**
- 3 Strammehuller til kædestrammeren**
- 4 Smørehullet**
- 5 Navn og model på sav**

OZAKI sværd (1/1 scale)

Identificer sværdet du behøver baseret på montering, smøring og strammehul.

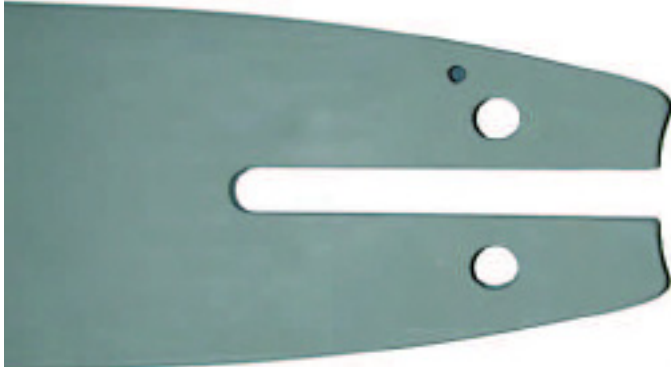**Type C**

Pitch: 3/8

Gauge: ,050

= WINDSOR MC

2503 +	Length
170-2101	12" - 30cm
170-2102	14" - 35cm
170-2103	16" - 40cm


**Type D**

Pitch: 3/8

Gauge: ,050

= WINDSOR SFJ

2503 +	Længde
170-2107	14" - 35cm
170-2108	16" - 40cm

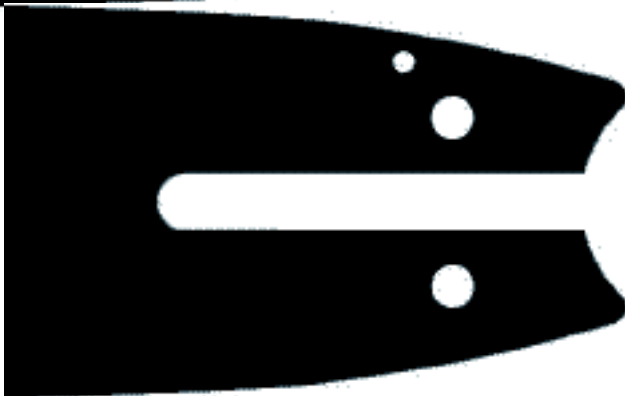**Type G**

Pitch: 3/8

Gauge: ,050

= WINDSOR PN

2503 +	Længde
170-2105	14" - 35cm
170-2106	16" - 40cm

**Type J**

Pitch: ,325

Gauge: ,050

= WINDSOR CJL

2503 +	Længde
170-7808	16"
170-7809	18"


Type K

Pitch: ,325

Gauge: ,058

= WINDSOR CJL

2503 +	Længde
170-2115	15"
170-2116	16"
170-2117	18"

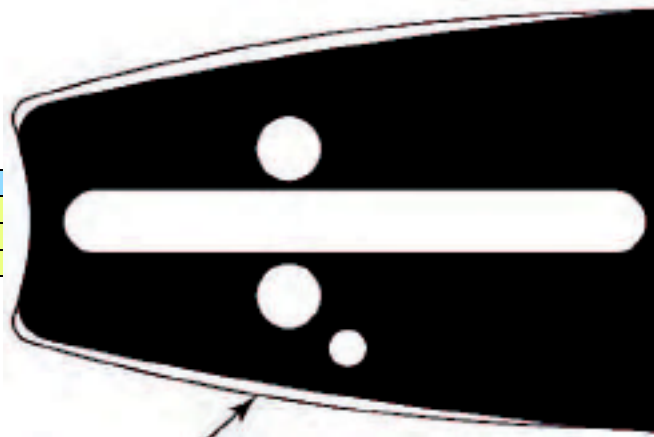


Type P

Pitch: ,325

Gauge: ,058

2503 +	Længde
170-2119	16" - 40cm
170-2120	18" - 45cm

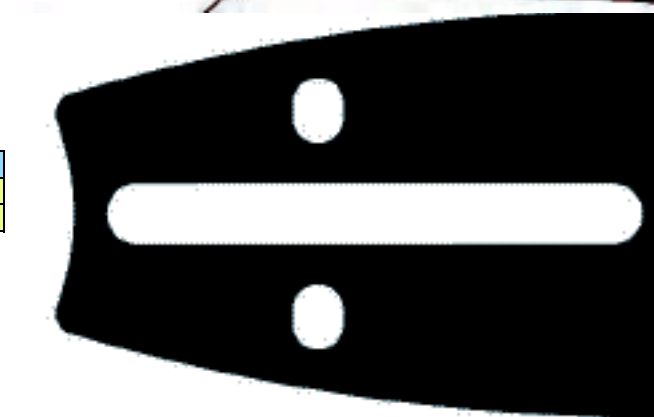


Type R

Pitch: ,325

Gauge: ,063

= WINDSOR 40 STIHL

2503 +	Længde
170-3001	15" - 38cm
170-2109	16" - 40cm
170-2110	18" - 45cm

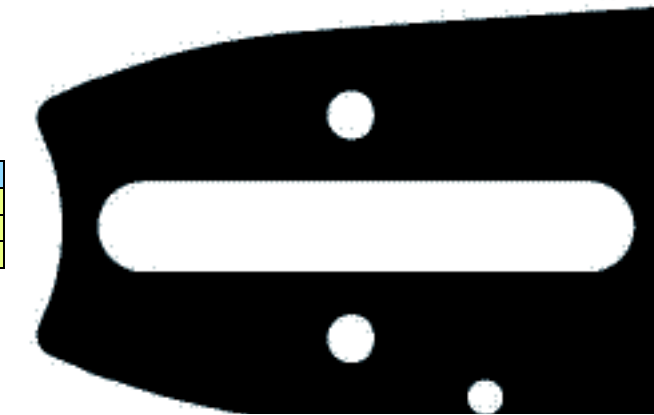


Type S

Pitch: 3/8

Gauge: ,058

= WINDSOR JR

2503 +	Længde
170-2121	16" - 40cm
170-2122	18" - 45cm
170-2123	20" - 50cm

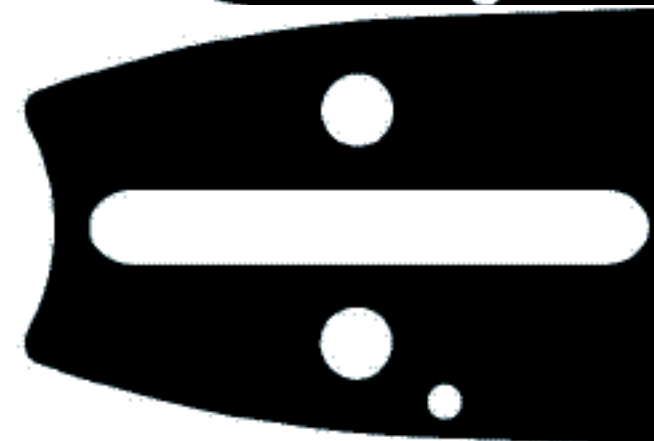




Type T

Pitch: 3/8
Gauge: ,058
= WINDSOR HS


2503 +	Længde
170-2828	15"
170-2111	16"
170-2112	17"
170-2113	18"
170-2114	20"

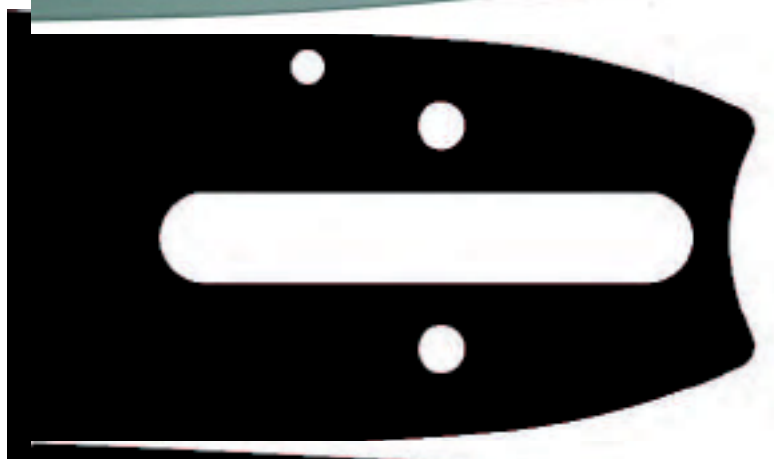

Type X

Pitch: 3/8
Gauge: ,063
= WINDSOR 40 STIHL


2503 +	Længde
170-2124	16" - 40cm
170-2125	18" - 45cm
170-2126	20" - 50cm

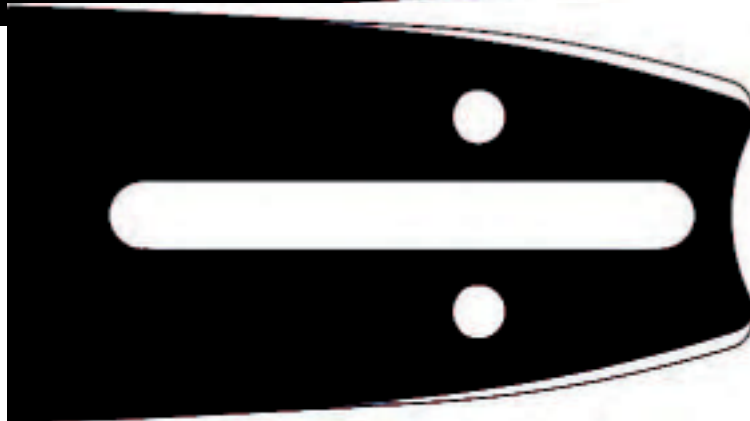

Type ZA

Pitch: 3/8
Gauge: ,050
= WINDSOR PKU


Code EG	Længde
170-2095	12" - 30cm
170-2096	14" - 35cm
170-2097	16" - 40cm

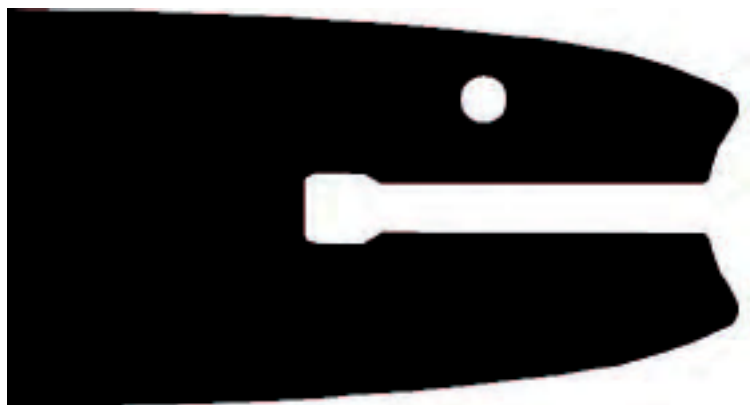

Type ZB

Pitch: 3/8
Gauge: ,050
= WINDSOR MXL

2503 +	Længde
170-2098	12" - 30cm
170-2099	14" - 35cm
170-2100	16" - 40cm

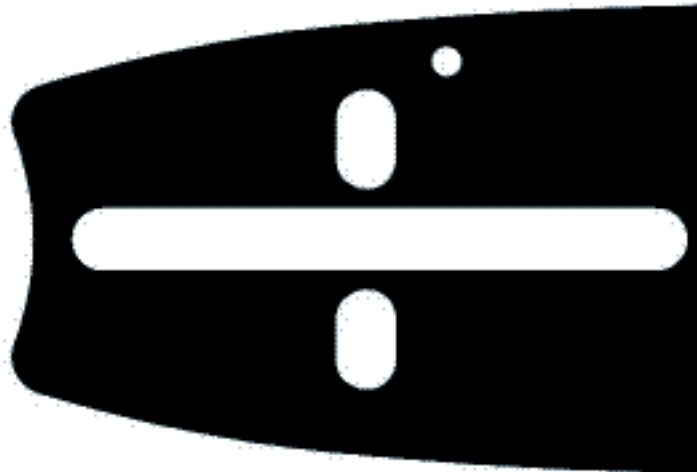

Type ZF

Pitch: 3/8

Gauge: ,050

2503 +	Længde
170-7366	18" - 45cm
170-7367	20" - 50cm

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip
AEG								
KES35	30	12	3/8LP	0.050	1,3	45E	170-2095	
KS30, KS35	35	14	3/8LP	0.050	1,3	52E	170-2096	
K170-2121	40	16	3/8LP	0.050	1,3	57E	170-2097	

ALKO

E1200, 1400E, 1500E, 2000, 2300	30	12	3/8LP	0.050	1,3	45E	170-2095	
E125, 25A, KS, KSB	35	14	3/8LP	0.050	1,3	52E	170-2096	
KE4000, KE3500, VARIO	40	16	3/8LP	0.050	1,3	57E	170-2097	
KB5000	40	16	.325	0.050	1,3	66E	170-7808	NEW
	45	18	.325	0.050	1,3	72E	170-7809	
3400	40	16	3/8	0.050	1,3	60E		ZK16TM50ATS
	45	18	3/8	0.050	1,3	64E	NEW	ZK18TM50ATS
	45	18	3/8	0.050	1,3	66E	170-7366	
	50	20	3/8	0.050	1,3	70E	170-7367	ZK204F50ATS

ALPINA

330, 380, Euro-35, Euro-40	30	12	3/8LP	0.050	1,3	44E	170-2101	
432,438, Euro-45	35	14	3/8LP	0.050	1,3	50E	170-2102	
P34, PR350	40	16	3/8LP	0.050	1,3	56E	170-2103	
ELECTRIC, E120, E130 E150, KS1400B, KS1500B	30	12	3/8LP	0.050	1,3	44E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
Elettra 160, Elettra 170 Energy 1.6, Energy 1.8 Sinergy 35, Sinergy 40 P360, P370, P390	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	55E	170-2106	
	30	12	3/8LP	0.050	1,3	44E	170-2104	
A-40, A-40E, P41, 170-2120	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
	40	16	.325	0.050	1,3	65E	170-7808	
PROF-41, PROF-45	45	18	.325	0.050	1,3	72E	170-7809	
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
	40	16	.325	0.050	1,3	65E	170-7808	
	45	18	.325	0.050	1,3	72E	170-7809	
P400, P450, P500, P460, P510 540, 540i, 550	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	
PROF-55, PROF-56, PROF-66 600, 600i, P650	38	15	3/8	0.058	1,5	56E		ZK15K58ATS
	40	16	3/8	0.058	1,5	60E	NEW	ZK16K58ATS
	43	17	3/8	0.058	1,5	64E	NEW	ZK18K58ATS
PROF-700, PROF-800 P700, P750, P800	45	18	3/8	0.058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0.058	1,5	72E	170-2114	ZK20T58ATS

BERNARD

BM225.3, BM230.0	30	12	3/8LP	0.050	1,3	45E	170-2095	
BM230.1, BM236.3	35	14	3/8LP	0.050	1,3	52E	170-2096	
BM441.3, BP441.5	40	16	3/8LP	0.050	1,3	57E	170-2097	
BM646.3, BP651.3	45	18	3/8	0.050	1,3	66E	170-7366	
BM751.3	50	20	3/8	0.050	1,3	70E	170-7367	ZK204F50ATS

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip

BLACK & DECKER

CS30, CS35, DN400, DN401, DN402, DN404, DN412 DN416, GK425, GK330, GK310 GK320, GK321, GK322, GK35,	30	12	3/8LP	0.050	1,3	44E	170-2101	
	35	14	3/8LP	0.050	1,3	49E	170-2102	
	40	16	3/8LP	0.050	1,3	56E	170-2103	

BLITZ

B300, B304, B34 B35D, B38, B400 B404, E140F	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	49E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
B42, B45A, B54A B45, B51	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
B50, B500, B501S B502, B504, B52, B55 B60, B600, B64, B701 B702, B80, B800 B802, B804	40	16	3/8	0.058	1,5	60E	170-2121	
	45	18	3/8	0.058	1,5	68E	170-2122	
	50	20	3/8	0.058	1,5	72E	170-2123	

BOSCH

1586.7, 1586.8, AKE30B AKE35B, AKE40B, GKE35BC GKE40BC, PKE25, PKE30B PKE35B, PKE40	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	

CASTOR


330, CX35, 380, C170-2124 423, 438, C170-2125, P34 P-34S, CP-34S, TR350	30	12	3/8LP	0.050	1,3	44E	170-2101	
	35	14	3/8LP	0.050	1,3	50E	170-2102	
	40	16	3/8LP	0.050	1,3	56E	170-2103	
ELETTRA 160, ELETTRA 170 High-Tech 1.6, High-ech 1.8	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	55E	170-2106	
CP370 - CP410	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
C40, C-40E, CP-41, CP-45	40	16	.325	0.050	1,3	65E	170-7808	
	45	18	.325	0.050	1,3	72E	170-7809	
	40	16	.325	0.058	1,5	66E	170-2116	NEW ZK18K58JTS
	45	18	.325	0.058	1,5	72E	170-2117	
CP400, CP450, CP500, CP460 CP510, CP540, CP540i, CP550	40	16	.325	0.058	1,5	66E	170-2116	ZK18K58JTS
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
CP55, CP56, CP65, CP66 CP600, CP600i, CP650	38	15	3/8	0.058	1,5	56E		ZK15K58ATS
	40	16	3/8	0.058	1,5	60E	NEW	ZK16K58ATS
	43	17	3/8	0.058	1,5	64E		ZK18K58ATS
CP-700, CP750	45	18	3/8	0.058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0.058	1,5	72E	170-2114	ZK20T58ATS

DANARM

1-36MARKIII	35	14	3/8LP	0.050	1,3	52E	170-2107	
1-36MARKIV	40	16	3/8LP	0.050	1,3	56E	170-2108	

DOLMAR

ES-152A, ES-162A, ES172A, PS-34 PS-3300TH, PS-330-PS-340 PS-341-PS344-PS-400 PS-401, PS-33, 100, 102, 103 105, 108	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
111,115i	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
112,113,114 116,ES-1800	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
109-111-112-115-PS52-117-119 219-PS6000-PS6800-1231-120Si	38	15	3/8	0.058	1,5	56E		ZK15K58ATS
	40	16	3/8	0.058	1,5	60E	NEW	ZK16K58ATS
	43	17	3/8	0.058	1,5	64E		ZK18K58ATS
PS-6400, PS-7300, PS-7900	45	18	3/8	0.058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0.058	1,5	72E	170-2114	ZK20T58ATS

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip
DYNAMAC								
DY36	30	12	3/8LP	0.050	1,3	44E	170-2095	
	35	14	3/8LP	0.050	1,3	49E	170-2096	
	40	16	3/8LP	0.050	1,3	56E	170-2097	
30F, 35F, 140F, Y, 17E, DY36	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	49E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
45	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
DY56 - DY62	40	16	3/8	0.058	1,5	60E		ZK16K58ATS
	43	17	3/8	0.058	1,5	64E		ZK18K58ATS
55DELUXE	40	16	3/8	0.058	1,5	60E	170-2121	
	45	18	3/8	0.058	1,5	68E	170-2122	
	50	20	3/8	0.058	1,5	72E	170-2123	

ECHO								
CS-258EVL, CS-290EVL CS-300EVL, CS280E CS-302, CS-315 CS-320EVL, CS-328 CS-330EVL, CS-360EVL E155, CS-2800, CS-2900 CS2000, CS3000, CS3050 CS3400, CS3450, CS440 ECS150, ECS1850FT CS2600, CS3000, CS3400 CS3050, CS3500	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
CS-3600, CS-360EVL CS-4000, CS-400EVL CS-4010, CS440EVL CS-4500, CS-4510 CS-4600, CS4610 CS-5000, CS4400, CS-4200	38	15	.325	0.058	1,5	64E	170-2118	
	40	16	.325	0.058	1,5	66E	170-2119	
	45	18	.325	0.058	1,5	72E	170-2120	
CS-60S, CS-451VL CS-452VL, CS-500EVL CS-500VL, CS-510EVL CS-550EVL, CS-600EVL CS-602VL, CS-610EVL CS-650EVL, CS-660EVL	45	18	3/8	0.050	1,3	64E	170-7366	
	50	20	3/8	0.050	1,3	70E	170-7367	ZK204F50ATS

EFCO								
131, 132	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	56E	170-2097	
134, 135, 114E, 115, 116E, 117E 136, 140, 140S, 119	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	49E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
142, 146, 151, 156, 162, 147	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
170, 180, 171, 181	40	16	3/8	0.058	1,5	60E	170-2121	
	45	18	3/8	0.058	1,5	68E	170-2122	
	50	20	3/8	0.058	1,5	72E	170-2123	

EINHELL								
40A, 41, MKS30 MK170-2121AV	35	14	3/8LP	0.050	1,3	52E	170-2107	
	40	16	3/8LP	0.050	1,3	56E	170-2108	
PES30, PES34 PES34, PES35, PE170-2121, KSE1640, DSE1435 PES1640, PES1540 KSE1435, KSE1635, KSE KSE1640, KSE2000 PKS1635, PKS1840	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
PK170-2122/1AV PK550/4AV	38	15	.325	0.058	1,5	64E	170-2115	
	40	16	.325	0.058	1,5	68E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip
FRONTIER								
F35AV, FB35, FB35AV	35	14	3/8LP	0.050	1,3	52E	170-2107	
FB35VIP, FP35	40	16	3/8LP	0.050	1,3	56E	170-2108	
FP365VIP, MK1								
F170-2120	40	16	.325	0.050	1,3	65E	170-7808	
	45	18	.325	0.050	1,3	72E	170-7809	

GARDEN

35, 40, 45, 245, GD33	30	12	3/8LP	0.050	1,3	44E	170-2101	
	35	14	3/8LP	0.050	1,3	50E	170-2102	
	40	16	3/8LP	0.050	1,3	56E	170-2103	
16, E17, GD160, GD170	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	55E	170-2106	
GD36, GD39	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
GD45, GD50	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS

HITACHI

CS280A, CS280B CS350A, CS350B	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	


HOMELITE

20AV, 23AV, 27, 3300, 3350, 3550 3800, 3850, 4500, 4550, PS33	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	56E	170-2097	
192, 200, 240SL, 145SL SUPER2/2CC ELECTRIC, XL, XL-10 XL2CC, XL2SUPER, XLTI BANDIT LX30, EL14 SABRE 31, 33, 205	30	12	3/8LP	0.050	1,3	48E	170-2098	
	35	14	3/8LP	0.050	1,3	53E	170-2099	
	40	16	3/8LP	0.050	1,3	59E	170-2100	
30, 150, EZ, EZAUTO MINI, SUPEREZAUTO SUPERXLMINI, EZ250 VISUPERMINI VI-123, VI-125, XL-76 XL100SERIES, XL250 415b, 4550b	40	16	.325	0.050	1,3	67E	170-7808	NEW
	45	18	.325	0.050	1,3	72E	170-7809	
250, 252, 290, 290C 300, 340, 340C 3850B, 145b, 4550b	40	16	.325	0.050	1,3	66E	170-7808	
	45	18	.325	0.050	1,3	73E	170-7809	
	38	15	.325	0.058	1,5	65E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	67E	170-2116	
	45	18	.325	0.058	1,5	73E	170-2117	ZK18K58JTS
330, 350, 360AO, 360SL 410, 450, 450SL, 550, 550SL, 650 750, 925, 955, SXL925, XL12, 8800	40	16	3/8	0.050	1,3	60E	NEW	ZK16UX50ATS
	50	20	3/8	0.050	1,3	70E	NEW	ZK20UX50ATS
330, 350, 360AO, 360SL 410, 450, 450SL, 550, 550SL, 650 750, 925, 955, SXL925, XL12, 8800 355SL, 400, 460, 540, 800, 825, 850, 900, 922, 923, XL400, XL700 XL800, XL900	45	18	3/8	0.050	1,3	66E	NEW = RN/ST	ZK1814A166PS
	50	20	3/8	0.050	1,3	70E	NEW = RN/ST	ZK2014A170PS

HUSQVARNA

33, 36, 40, 41, 42, 44, 45, 49, 50, 51 55, E1400, E1600, EL16, 242XP EL1200, 136, 141, 340, 345, 346 350, 351	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
32, 36, 40, 41, 42, 44, 45, 50, 51, 55, 133, 154, 234, 238, 242, 242xp 246, 254, 257, 262, 340, 444, 136 141, 357XP, 362XP, 372XP, 385XP	45	18	.325	0.058	1,5	72E	NEW = RN/ST	ZK1816K272PS
	50	20	.325	0.058	1,5	80E	NEW = RN/ST	ZK2016K280PS

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip
HUSQVARNA (fortsat)								
133	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
234, 238, 242, 246, 340, EL16	40	16	.325	0.058	1,5	66E	170-2116	
EL1400, EL1500, EL1600	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
EL1200, 444, 136, 141								
154, 254, 257, 262, 362, 357, 359	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
455	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
	45	18	3/8	0.058	1,5	64E	170-8104	
	50	20	3/8	0.058	1,5	72E	170-8105	
154, 254XP/G, 257, 262, 262XP	45	18	3/8	0.058	1,5	68E	= RN/ST	ZK1816A268PS
362XP/G, 261, 357XP, 55 Ranch	50	20	3/8	0.058	1,5	72E	= RN/ST	ZK2016A272PS
162, 61, 181, 2100	38	15	3/8	0.058	1,5	56E	170-2828	
2100, 266	40	16	3/8	0,058	1,5	60E	170-2111	ZK16T58ATS
268,272	43	17	3/8	0,058	1,5	64E	170-2112	ZK17T58ATS
281, 285, 288, 365,	45	18	3/8	0,058	1,5	68E	170-2113	ZK18T58ATS
371, 394, 298	50	20	3/8	0,058	1,5	72E	170-2114	ZK20T58ATS
380, 480, 65,66, 77	55	22	3/8	0,058	1,5	76E		ZK22T58ATS
372, 385	60	24	3/8	0,058	1,5	84E		ZK24T58ATS
	45	18	3/8	0,058	1,5	68E	= RN/ST	ZK1817A268PS
	50	20	3/8	0,058	1,5	72E	= RN/ST	ZK2017A272PS
3120, 395	38	15	3/8	0.058	1,5	56E	170-2828	
	40	16	3/8	0,058	1,5	60E	170-2111	ZK16T58ATS
	43	17	3/8	0,058	1,5	64E	170-2112	ZK17T58ATS
	45	18	3/8	0,058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0,058	1,5	72E	170-2114	ZK20T58ATS
	55	22	3/8	0,058	1,5	76E		ZK22T58ATS
	60	24	3/8	0,058	1,5	84E		ZK24T58ATS
IKRA								
KS1400, KS1500, KS1600	30	12	3/8LP	0.050	1,3	45E	170-2095	
EKS1600, EKS1700, EKS1800	35	14	3/8LP	0.050	1,3	52E	170-2096	
KS2000, KS1200, KS1400	40	16	3/8LP	0.050	1,3	57E	170-2097	
	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	56E	170-2097	
JONSERED								
2033TH	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
EL14, EL1200, 45E, 49SP, 50	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
2014, 2015, 2016, 2012	40	16	.325	0.058	1,5	66E	170-2116	
51, 370, 380, 410, 420	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
435, 450, 451, 45								
451EVS, 452, 490, 455								
510, 520, 525, 535, 590								
2012, 2014, 2015								
2016, 2036, 2040								
2041, 2045, 2149, 2050								
2051, 2054, 2055								
2150, 2145, 2141, 2152, 2137								
490, 520SP, 525, 535, 590, 2050	40	16	3/8	0.058	1,5	60E	NEW	ZK16K58ATS
2051,2055,2063,cs2159	45	18	3/8	0.058	1,5	64E	NEW	ZK18K58ATS
2063, 2163, 2159, 2165	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
2063, 2163, 2159, 2165	38	15	3/8	0.058	1,5	56E	NEW	ZK15K58ATS
	40	16	3/8	0.058	1,5	60E	NEW	ZK16K58ATS
	45	18	3/8	0.058	1,5	64E	NEW	ZK18K58ATS
	50	20	3/8	0.058	1,5	72E	NEW	170-8105
625, 630, 630SUPER	38	15	3/8	0.058	1,5	56E	170-2828	
670, 670CHAMP	40	16	3/8	0.058	1,5	60E	170-2111	ZK16T58ATS
2077, 2083, 2094, 2095	43	17	3/8	0.058	1,5	64E	170-2112	ZK17T58ATS
2095, 2065, 2071, 2171	45	18	3/8	0.058	1,5	68E	170-2113	ZK18T58ATS
2165, 2186	50	20	3/8	0.058	1,5	72E	170-2114	ZK20T58ATS
820/830*, 920/930*	55	22	3/8	0.058	1,5	76E		ZK22T58ATS
(with 9mm stud)	60	24	3/8	0.058	1,5	84E		ZK24T58ATS

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip
JONSERED (fortsat)								
60, 62, 66, 70, 75	40	16	3/8	0.058	1,5	60E	170-2121	
80, 90, 601, 621	45	18	3/8	0.058	1,5	68E	170-2122	
751, 801, 820, 830	50	20	3/8	0.058	1,5	72E	170-2123	
910E, 920, 930								
MAKITA								
DCS330S, DCS350, DCS390	30	12	3/8LP	0.050	1,3	45E	170-2095	
DC170-21210, DSC380, DCS300	35	14	3/8LP	0.050	1,3	52E	170-2096	
DCS340, DCS341, DC170-21211	40	16	3/8LP	0.050	1,3	57E	170-2097	
U170-210100, U170-210200, U170-								
DCS430, DCS520	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
DCS4300i, DCS5200i	40	16	.325	0.058	1,5	66E	170-2116	
DCS430, DCS520	45	18	.325	0.058	1,5	72E	170-2117	ZK18K58JTS
DCS43001								
DCS520i, DCS540, DCS5200i	40	16	3/8	0.058	1,5	60E		ZK16K58ATS
DCS6000i, DCS6800i	45	18	3/8	0.058	1,5	64E		ZK18K58ATS
DCS-6400, DCS-7300	38	16	3/8	0.058	1,5	60E	170-2828	
DCS79000	45	18	3/8	0.058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0.058	1,5	72E	170-2114	ZK20T58ATS
	55	22	3/8	0.058	1,5	76E		ZK22T58ATS
	60	24	3/8	0.058	1,5	84E		ZK24T58ATS
MAC CULLOCH (Italy)								
ProMac 54, 61, 72	40	16	3/8	0.058	1,5	60E	170-2121	
	45	18	3/8	0.058	1,5	68E	170-2122	
	50	20	3/8	0.058	1,5	72E	170-2123	
MAC CULLOCH								
474, 484, 735, C180	30	12	3/8LP	0.050	1,3	44E	170-2101	
CALIFORNIA/ARIZON	35	14	3/8LP	0.050	1,3	50E	170-2102	
CALIFORNIA 90	40	16	3/8LP	0.050	1,3	55E	170-2103	
EAGERBEAVER								
MAC 120, MAC 130								
MM30, MM35, PM36, PM310								
PM320, 330, 340								
PM360, PM364, PM370, PM380								
PM470, PM480, PM510, PM400								
PM6, PM730, EMAC1040								
PM484, MAC940, DAY.900								
MINI MAC (All models)								
3214/6, 3516/8, EB2.3, MacCat								
PM394, PM494	30	12	3/8LP	0.050	1,3	44E	170-2101	
MAC 930, MAC935, Mac-cat 839	35	14	3/8LP	0.050	1,3	50E	170-2102	
Electromac 1030, 1035	40	16	3/8LP	0.050	1,3	56E	170-2103	
Mac120, 14A/S, EM16								
10, 12, 14, 16E								
3500, 400P, TITAN35	40	16	.325	0.050	1,3	66E	170-7808	
TITAN40	45	18	.325	0.050	1,3	72E	170-7809	
PM38, PM40, PM46								
DAYTONA 1000								
TITAN41, TITAN46								
4600, 4700, 4900, 5000								
TIMBERBEAR 849								
MAC950, MAC960, MAC970	40	16	3/8	0.058	1,5	60E	170-2121	
300, 050, 006	45	18	3/8	0.058	1,5	68E	170-2122	
PROMAC51, PROMAC55	50	20	3/8	0.058	1,5	72E	170-2123	
PROMAC60, PROMAC70								
1-10, 2-10, 3-10, 4-10, 5-10	40	16	3/8	0.050	1,3	60		ZK16TM50ATS
6-10, 7-10, 10-10,55,555,560	50	20	3/8	0.050	1,3	70		ZK20TM50ATS
570, 605, 610, 620, 645, 650								
METABO								
KT1530	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
5338	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	55E	170-2106	

Navn & model	Længde		Deling	Spor		Drive link	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip

NAUTAC

135, 140, 144, 232, 236	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	49E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
244, 246, 252	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
149, 155, 170, 256 2561	40	16	3/8	0,058	1,5	60E	170-2121	
	45	18	3/8	0,058	1,5	68E	170-2122	
	50	20	3/8	0,058	1,5	72E	170-2123	

OLEO MAC / OLYMPIC

931, 932	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	56E	170-2097	
OM-E200	30	12	3/8LP	0.050	1,3	45E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
240	30	12	3/8LP	0.050	1,3	45E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
938, 942, 945, 950, 946 950SUPER, 947, 952 950A, 951, E300F 956, 962	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
956, 962	38	15	.325	0,058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
956, 962	40	16	3/8	0.058	1,5	60E	170-2121	ZK16K58ATS
	45	18	3/8	0,058	1,5	68E	170-2122	
	50	20	3/8	0,058	1,5	72E	170-2123	
350A, 251, 521SUPER 351B, 252, 254, 261 264, 271, 272, 284 350, 350SUPER, 355 460, 480, 481, 482 484, E300, OM-E300	40	16	3/8	0,058	1,5	60E	170-2121	
	45	18	3/8	0,058	1,5	68E	170-2122	
	50	20	3/8	0,058	1,5	72E	170-2123	
970, 980, 971, 981	40	16	3/8	0,058	1,5	60E	170-2121	
	45	18	3/8	0,058	1,5	68E	170-2122	
	50	20	3/8	0,058	1,5	72E	170-2123	

OPEM

130Z, 140Z, 142Z	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
K1, K2, K3, K25 SUPER	38	15	.325	0.058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0.058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
K3	40	16	3/8	0,058	1,5	60E	170-2121	ZK16K58ATS
	45	18	3/8	0,058	1,5	64E	170-2122	ZK18K58ATS

OZAKI

TRC1840	40	16	3/8LP	0.050	1,5	57E	170-2097	
---------	----	----	-------	-------	-----	-----	----------	--

PARTNER (Italy)

P541	40	16	3/8	0.050	1,3	60E	170-2121	
	45	18	3/8	0.050	1,3	68E	170-2122	
	50	20	3/8	0.050	1,3	72E	170-2123	

PARTNER

1601, 1602, 1612, 1613 1614, 1616, 1618	35	14	3/8LP	0.050	1,3	52E	170-2107	
	40	16	3/8LP	0.050	1,3	56E	170-2108	
330, 335, 340, 345, 360, 365, 385 395, 351, 370, P390, P420 350	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	56E	170-2097	

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip

PARTNER (continued)

360, 365, 400, 405, 450 465, 495, 510, 540, 500, 545 MINIFARMERSAW P500, P5000, P5500 1200EL, 1400EL, 1450 1500EL, 1650 410, 460, 510	38	15	.325	0,058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
660, P7700, 710	40	16	3/8	0,058	1,5	60E	170-2111	ZK16T58ATS
	45	18	3/8	0,058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0,058	1,5	72E	170-2114	ZK20T58ATS
	55	22	3/8	0,058	1,5	76E		ZK22T58ATS
	60	24	3/8	0,058	1,5	84E		ZK24T58ATS

PIONEER

P10, P11, P12, P12S	35	14	3/8LP	0.050	1,3	52E	170-2107	
	40	16	3/8LP	0.050	1,3	56E	170-2108	
1072, 1073, 1074 970, P21, P25, P26 P28, P28S	38	15	.325	0,058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS

POULAN

1800, 200, 2300AV 2300CVA, 25A MICRO25, S25CVA S25D, S25DA, P600	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
200SERIES, 245, 375 300SERIES, 306, 3400 360, 361, 3700, 3800 400SERIES, 4000, 4200 4400, 4900, 5200, 5400	45	18	3/8	0.050	1,3	68E	170-7366	
	50	20	3/8	0.050	1,3	70E	170-7367	ZK204F50ATS

RYOBI

CSE5145, CSE5650	40	16	.325	0,058	1,5	68E	170-2119	
	45	18	.325	0,058	1,5	72E	170-2120	

SABRE

SABRE31, 33, 205, 3350B S35	30	12	3/8LP	0.050	1,3	48E	170-2098	
	35	14	3/8LP	0.050	1,3	52E	170-2099	
	40	16	3/8LP	0.050	1,3	59E	170-2100	

SHINDAIWA - SDK - ISEKI

A090B, A100C, A102 A103, A104P, A105B A107, A110, A110P A113, A113L, A113P A117P, 140, A150B 150E, 160, A180, 300S 305, 305AVZ, 340, 345 346, 350, 355, 357 360, EYB120, EYB150 EYB180, YB291, YB301 YB391, YB395, YB401, YB491 YB501, YB601, YB701	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
360, 366, 377, 400, 415 416, 420, 450, 451, 488 500, 510, 561, 580, A180B YB495, YB691, YB377	40	16	.325	0,058	1,5	66E	170-2119	
	45	18	.325	0,058	1,5	72E	170-2120	
360, 366, 377, 400, 415 416, 420, 450, 451, 488 500, 510, 561, 580, A180B YB495, YB691, YB377	38	15	.325	0,058	1,5	64E	170-2118	
	40	16	.325	0,058	1,5	66E	170-2119	
	45	18	.325	0,058	1,5	72E	170-2120	

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip

SHINDAIWA - SDK - ISEKI

575, 577, 680, 695, 757 757C, YB801, YB901 YB1091	40	16	3/8	0,058	1,5	60E	170-2111	ZK16T58ATS
	43	17	3/8	0,058	1,5	64E	170-2112	ZK17T58ATS
	45	18	3/8	0,058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0,058	1,5	72E	170-2114	ZK20T58ATS
	55	22	3/8	0,058	1,5	76E		ZK22T58ATS
	60	24	3/8	0,058	1,5	84E		ZK24T58ATS

SHINGU

SP3200T, PS3200 SP3400	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
S170-211900	45	16	.325	0.050	1,3	66E	170-2119	
	45	18	.325	0.050	1,3	72E	170-2120	

SOLO

613	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	
639, 641, 644, 650 645, 647, 651, 654	38	15	.325	0,058	1,5	65E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	67E	170-2116	
	45	18	.325	0,058	1,5	73E	170-2117	ZK18K58JTS
662, 667, 670, 680 690, 694	38	15	3/8	0,058	1,5	56E	170-2828	
	40	16	3/8	0,058	1,5	60E	170-2111	ZK16T58ATS
	43	17	3/8	0,058	1,5	64E	170-2112	ZK17T58ATS
	45	18	3/8	0,058	1,5	68E	170-2113	ZK18T58ATS
	50	20	3/8	0,058	1,5	72E	170-2114	ZK20T58ATS

STIHL

009, 010, 011, 018, 019, 019T, 020 020T, 021, 023, 025, E10, E14 E160, E180, MS200, MS200T MS210, MS230 MS250, MS180	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	55E	170-2106	
024, 026, 028 MS240, MS260, MS270, MS280	38	15	.325	0,063	1,6	62E	170-3001	
	40	16	.325	0,063	1,6	67E	170-2109	ZK16R63JTS
	45	18	.325	0,063	1,6	74E	170-2110	ZK18R63JTS
	45	18	.325	0,063	1,6	74E		ZK1831K374PM
024, 026, 028 MS240, MS260, MS270, MS280	38	15	3/8	0,063	1,6	63E	NEW	ZK15R63JTS
	50	20	3/8	0,063	1,6	81E		ZK20R63JTS
029, 031, 032, 034, 036, 038 039, 041, 042 044, 045, 046, 048, 056 064, 066, E15, E20, E220 MS290, MS310, MS390 MS340, MS360, MS440, MS460 MS640, MS660	40	16	3/8	0,063	1,6	60E	170-2124	
	45	18	3/8	0,063	1,6	66E	170-2125	ZK18X63ATS
	50	20	3/8	0,063	1,6	72E	170-2126	ZK20X63ATS
	45	18	3/8	0,063	1,6	66E	NEW = RN/ST	ZK1831A366PS
	50	20	3/8	0,063	1,6	72E	NEW = RN/ST	ZK2031A372PS
	63	24	3/8	0,063	1,6	84E		ZK24X63ATS
MS390-MS440-MS660-MS880 038-039-041-048-056-064-066-088	63	24	3/8	0,063	1,6	84E	NEW	ZK24X63ATS

STIGA

SE1.6, SE1.8	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	55E	170-2106	
SP340	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	50E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
SP460, SP510	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS

TAS TANAKA

290, 300, ECS330 ECS3500, ECS360, ECS320 ECS3301, ECS3351	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	57E	170-2097	

Navn & model	Længde		Deling	Spor		Led	2503 +	
	cm	Inch		Inch	mm		Pro-Steel	Pro-tip
TAS TANAKA (fortsat)								
ECS4000, ECV-4501	38	15	.325	0,058	1,5	64E	170-2118	
	40	16	.325	0,058	1,5	66E	170-2119	
	45	18	.325	0,058	1,5	72E	170-2120	
650, EC170-21236, 655	45	18	3/8	0,050	1,3	66E	170-7366	
	50	20	3/8	0,050	1,3	70E	170-7367	ZK204F50ATS

VAP

1400, 35F, 38, 40F 44F, 52F, 530, 534 535, 538, 60F	30	12	3/8LP	0.050	1,3	44E	170-2104	
	35	14	3/8LP	0.050	1,3	49E	170-2105	
	40	16	3/8LP	0.050	1,3	56E	170-2106	
14F, 542, 68F	38	15	.325	0,058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
49, 050E, 549, 55 553, 553S, 555, 570 65F, 69E, 70, 72F 72FS, 82F, 90F	40	16	3/8	0,058	1,5	60E	170-2121	
	45	18	3/8	0,058	1,5	68E	170-2122	
	50	20	3/8	0,058	1,5	72E	170-2123	

ZENOAH

GT250-10, GT310-12, GT310-14 GT300T/S, GT310TS G320AVS G3800AVS-14, G3800AVS-16 G250TS, G3100, G3800	30	12	3/8LP	0.050	1,3	45E	170-2095	
	35	14	3/8LP	0.050	1,3	52E	170-2096	
	40	16	3/8LP	0.050	1,3	56E	170-2097	
G380AVS	38	15	.325	0,058	1,5	64E	170-2118	
	40	16	.325	0,058	1,5	66E	170-2119	
G410AS, G455AVS G500AVS, G38, G46 G415AVS, G455AVS, G500AVS	38	15	.325	0,058	1,5	64E	170-2115	ZK15K58JTS
	40	16	.325	0,058	1,5	66E	170-2116	
	45	18	.325	0,058	1,5	72E	170-2117	ZK18K58JTS
G621AVS	45	18	3/8	0.050	1,3	64E	170-7366	
	50	20	3/8	0.050	1,3	72E	170-7367	ZK204F50ATS